

**SUMITOMO RECOMMENDED PROCEDURE****SRP SP-F04-010****FIELD TERMINATION KIT PROCEDURE FOR  
FTFLD02, FTFLD04 and FTFLD06 900µm SUB-UNIT KITS**

<b><u>PARA.</u></b>	<b><u>CONTENTS</u></b>
1.0	General
2.0	Safety Precautions
3.0	Reference Documents
4.0	Equipment / Tools Required
5.0	Preparing the Fiber Bundle
6.0	Field Termination Kits
7.0	Assembling the Field Termination Kit

**SUMITOMO ELECTRIC LIGHTWAVE CORP.**

201 South Rogers Lane, Suite 100, Raleigh, NC 27610

(919) 541-8100 or 1-800-358-7378

[www.sumitomoelectriclightwave.com](http://www.sumitomoelectriclightwave.com)

SEL is a Member of the Sumitomo Electric Industries, Ltd. Group

*Sumitomo Electric Lightwave reserves the right to improve or modify these specifications without notice.*

## 1.0 General

1.1 This procedure describes the standard techniques for installing the FutureFLEX Air-Blown Fiber (ABF) 2, 4, 6 fiber bundle Field Termination Kits with 900 $\mu$ m sub-units / colored-coded tubes.

1.2 Field Termination Kits are used at locations where fiber bundles containing 250 $\mu$ m fibers are to be terminated and connectorized at fiber optic patch panels, switches, or transmitter / receiver locations.

## 2.0 Safety Precautions

2.1 When stripping jacketing materials from fiber bundles, use care and properly dispose of any individual fiber ends that are removed. The fiber ends are easily misplaced and can pierce the skin resulting in splinters that are not easily removed.

2.2 The use of safety glasses is strongly recommended during this procedure.

## 3.0 Reference Documents

3.1 Sumitomo Recommended Procedure, *FutureFLEX Fiber Bundle Stripping Procedure*, SRP SP-F04-006.

## 4.0 Equipment / Tools Required

The following equipment, tools, and materials, are required to complete this procedure:

4.1 Field Termination Kits with 900 $\mu$ m sub-units

- FTFLD02 for 2-fiber ribbon bundle
- FTFLD04 for 4-fiber bundle
- FTFLD06 for 6-fiber bundle

4.2 Adhesive Tape

4.3 Pliers


4.4 Appropriate clean work surface / table

## 5.0 Preparing the Fiber Bundle

5.1 Provide at least 6" – 8" of additional fiber bundle strip length beyond the actual fiber length required. SEL's 2- 6 fiber bundle Field Termination Kits have an approximate 24" buffer tube length. Fiber bundle jackets should be stripped back at least 30" – 32".

5.2 **Important Step.** When terminating the 2, 4, and 6 fiber bundles, before stripping outer foam jacket, slide plastic tube provided in the FTFLD02, FTFLD04, and FTFLD06 Field Termination Kits over end of bundle. Position it slightly beyond the 30" – 32" point. **See Fig. 1.**

**Note:** 2-, 4-, and 6-fiber bundles have a 2mm OD outer foam jacket which is not large enough to fit comfortably in the Retainer Clip of the Breakout Unit Assembly. Plastic tube is required to increase outer foam jacket OD for a good fit in the Retainer Clip.

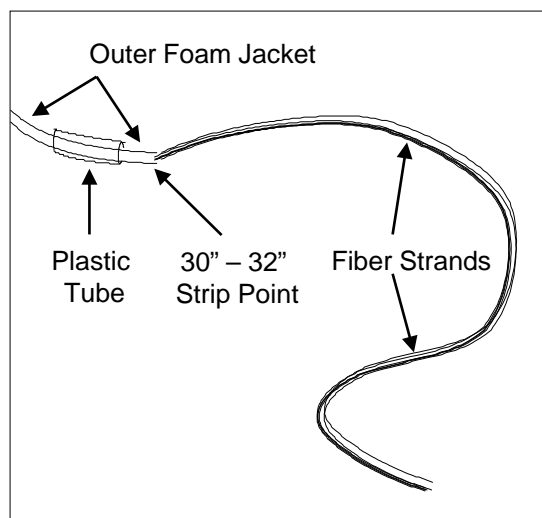

**Figure 1**  
Slide Plastic Tube Beyond  
2-, 4-, & 6-Fiber Bundle Strip Point

5.3 Refer to SRP SP-F04-006 for detailed fiber bundle stripping procedures and techniques. Remove outer foam jacket, access sub-unit rippcord, and remove inner nylon jacket.

5.4 Secure outer foam jacket to work surface with adhesive tape.


5.5 Separate and organize fiber bundle strands. At the point where the strands exit nylon sub-unit, carefully arrange them so they are not crossed and carefully separate them along their entire length. **See Fig. 2.**

5.5.1 2-fiber ribbon bundle strands are contained within one (1) nylon sub-unit in the following color-order sequence:  
Blue & Orange

5.5.2 4-fiber bundle strands are contained within one (1) nylon sub-unit in the following color-order sequence:  
Blue, Orange, Green, & Brown

5.5.3 6-fiber bundle strands are contained within one (1) nylon sub-unit in the following color-order sequence:

Blue, Orange, Green, Brown, Slate, & White

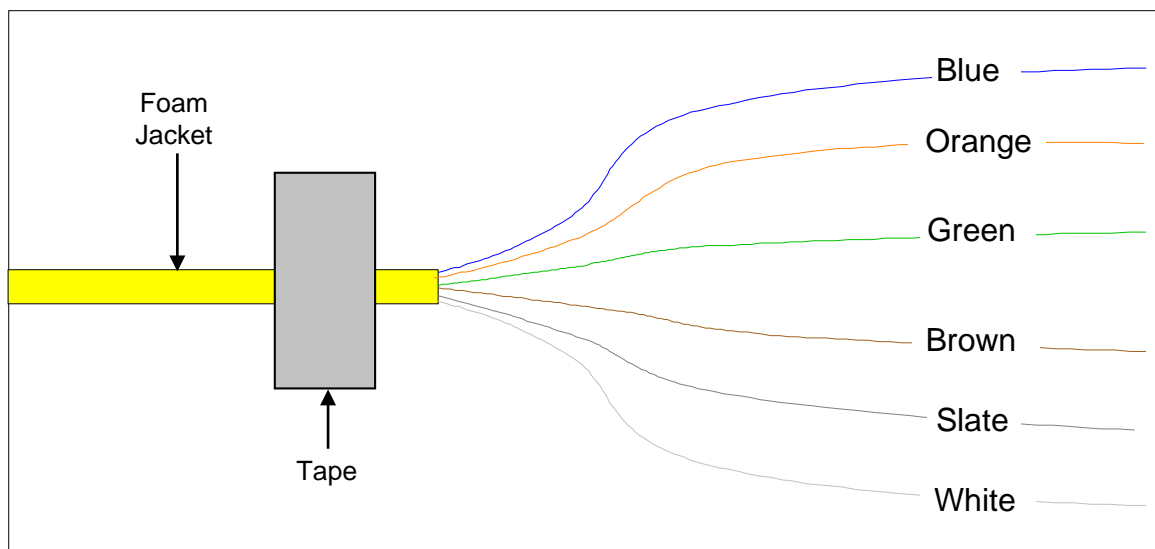

**Figure 2**  
Organizing 6-Fiber Bundle Strands in Color-Order Sequence  
(2, 4, and 6 Fiber Bundles Similar)


## 6.0 Field Termination Kits

6.1 Field Termination Kits consist of a Base Unit, Cover Unit, Breakout Unit Assembly and plastic tubing. **See Fig. 3.**

6.2 Base Unit includes a two (2) prong aluminum Retainer Clip that is press-fit into a retention clip center cavity. Retention Clip secures incoming fiber bundle. Base Unit cavity holds Breakout Unit Assembly.

6.3 Cover Unit snaps onto Base Unit to secure Breakout Unit Assembly and protect exposed bare fibers.

6.4 Breakout Unit Assembly consists of a rectangular black plastic block with color-coded 900 $\mu$ m OD tubing installed in the appropriate holes. Fibers are threaded through the tubes and then clamped using the plastic tubing and a pair of pliers to secure the retainer clip.

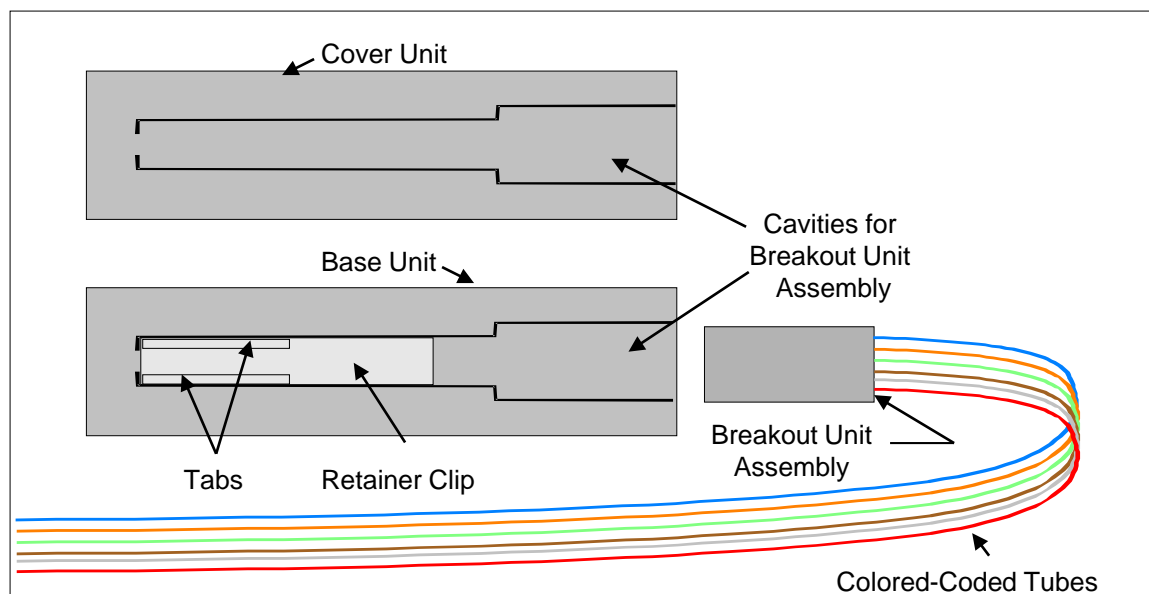

**Figure 3**  
Field Termination Kit Components

### Base Unit Specifications

Dimensions (in.): 1.70 L x 0.70 W x 0.150 D  
Material: ABS Plastic  
Color: Black  
Logo: FTFLDxx

### Tubing Specifications

Dimensions: mm / (in.):  
ID: 0.50mm +/- 0.05mm (0.020 +/- 0.002)  
OD: 0.90mm +/- 0.05mm (0.035 +/- 0.002)  
Length: Approximately 24 inches

### Cover Unit Specifications


Dimensions (in.): 1.70 L x 0.70 W x 0.150 D  
Material: ABS Plastic  
Color: Black  
Logo: Sumitomo Electric

### Mechanical:


Max. Tensile Load: 45 Newtons / 10 lbs.  
Min. Bend Radius: 1.3 cm / 0.5 inch  
Crush Resistance: 52 N/cm Max. / 0.03 lbs/in  
Temp. Rating: -40°C - +85°C (-40°F - +175°F)  
Material: Thermoplastic Elastomer

6.5 Breakout Unit Assembly tube colors and arrangement match ABF fiber bundle strand colors and arrangement. **See Fig. 4.**


Tube	Color		
1	Blue		
2	Orange		
3	Green		
4	Brown		
5	Slate		
6	White		

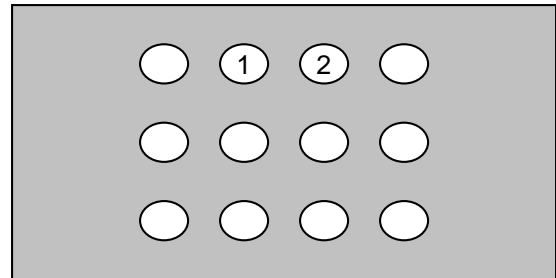

2-Fiber Ribbon Breakout Unit Assembly

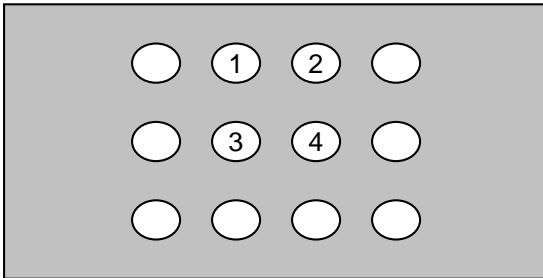

4-Fiber Breakout Unit Assembly

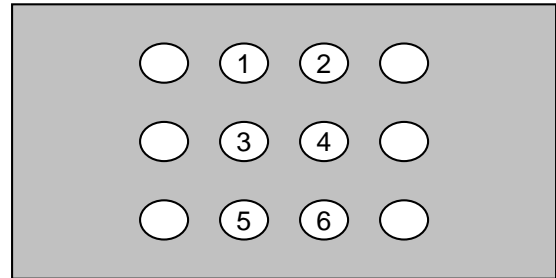

6-Fiber Breakout Unit Assembly

**Figure 4**  
 Breakout Unit Assembly Tube Colors & Arrangement

## 7.0 Assembling the Field Termination Kit


7.1 Remove Breakout Unit Assembly by separating Cover and Base Units.

7.2 Choose one of the fiber bundle nylon sub-units and, on a clean work surface, lay out the strands in a staggered color-order sequence. Work carefully and ensure strands are not crossed or twisted. **See Fig. 5.**

7.3 Insert each strand into its colored-coded tube. Begin with the longest (blue) strand first,

followed by the longest remaining strand (orange), and so on until all fibers are started into the Breakout Unit Assembly tubes.

7.4 Once all the strands of a sub-unit are started, carefully grasp and push all sub-unit fibers through Breakout Unit Assembly tubing as a group.

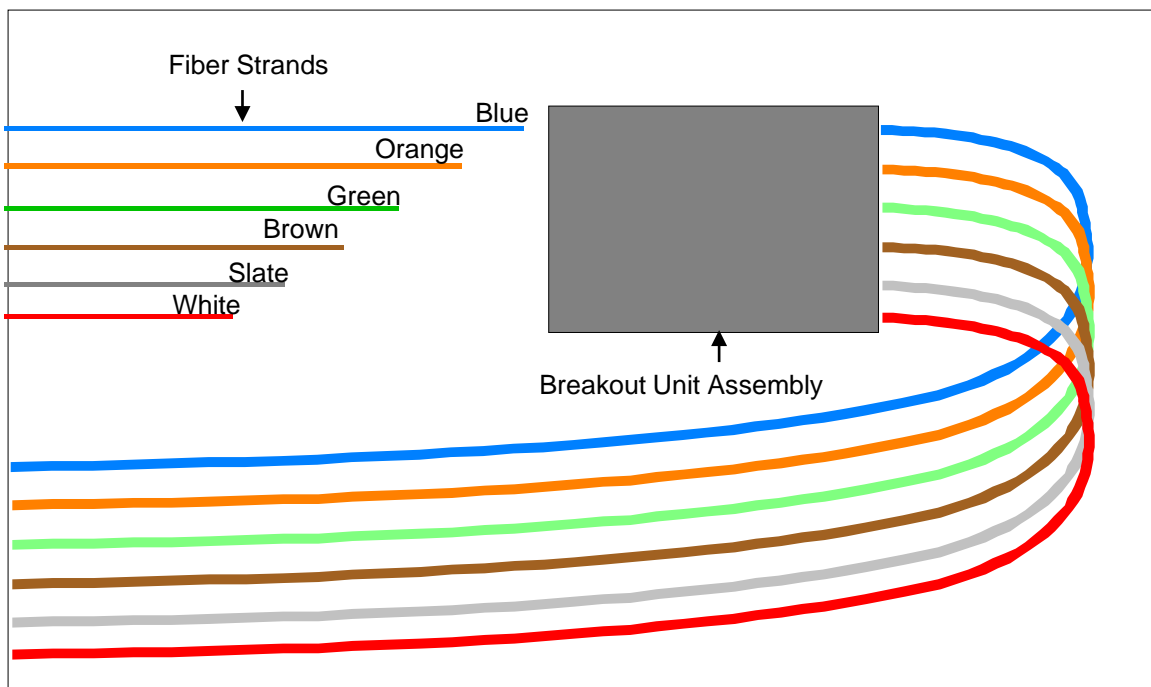

**Figure 5**  
Fiber Strands in Color-Order and Staggered Arrangement  
Ready to be Inserted into Breakout Unit Block One at a Time  
Then Pushed Through Tubes as a Group  
(6-Fiber Bundle Shown)

7.5 Once all fibers are inserted into Breakout Unit Assembly tubes, confirm that fiber strands are not crossed or twisted over each other between the end of the nylon jackets and the Breakout Unit Assembly block. Crossed fibers may cause additional optical attenuation due to macro-bending. If fibers are crossed, they should be carefully removed from the Breakout Unit Assembly tubes, straightened out, and re-installed.


7.6 Carefully place Breakout Unit Assembly into Base Unit cavity. **See Fig. 6.**

7.7 Carefully push all the fibers as a group into Breakout Unit Assembly until ends of fiber bundle outer foam and inner nylon jackets are even with or just forward of Base Unit's metal Retainer Clip.

**Note:** With 2-, 4-, and 6-fiber bundles, also slide plastic tube along fiber bundle jacket until it is even with or just forward of Base Unit's metal Retainer Clip.

7.8 Use pliers and carefully squeeze / close Retainer Clip tabs together over fiber bundle. Do not over-compress Retainer Clip tabs. There should be a small (about 1mm) gap between the tabs along their entire length. If the fiber bundle is compressed too much, some fibers may exhibit increased optical attenuation or, in extreme cases, breakage can occur.

7.9 Complete Field Termination Kit assembly by carefully snapping Cover Unit onto Base Unit.

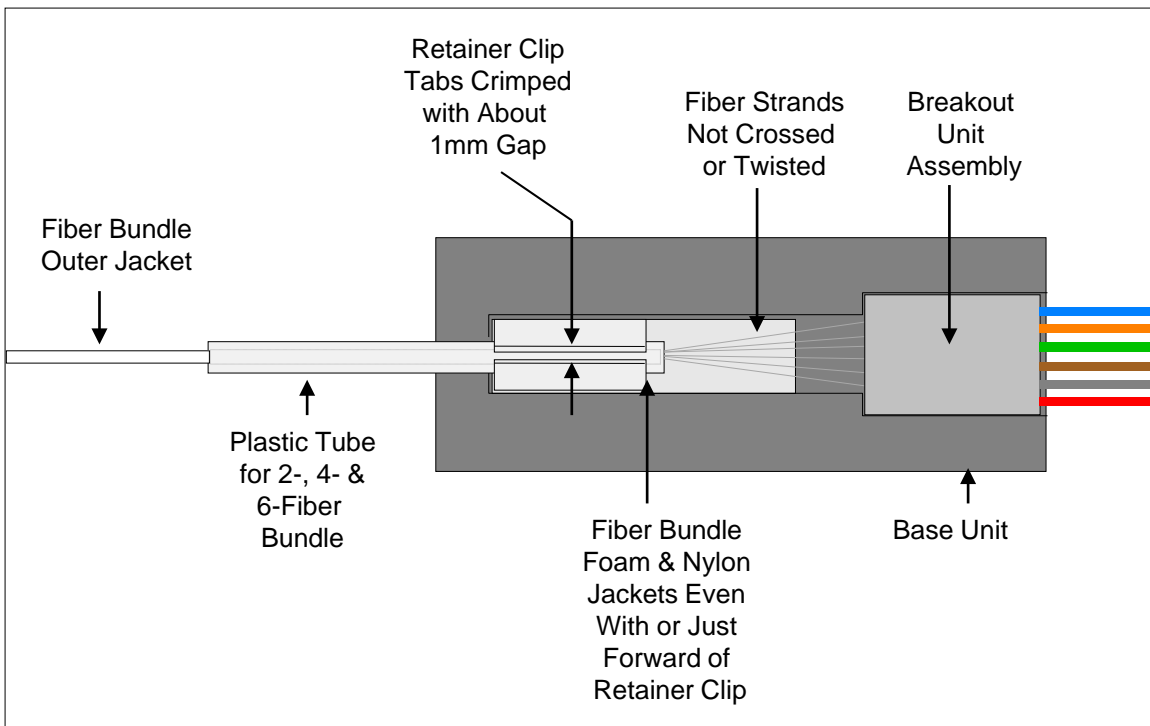

**Figure 6**  
Field Termination Kit Assembled