


Quick-SC & LC Mechanical Connectors

Quick-SC & LC Mechanical Connectors enable easy and fast fiber termination in the field. These connectors have taken mechanical connectors to new heights of performance and reliability.

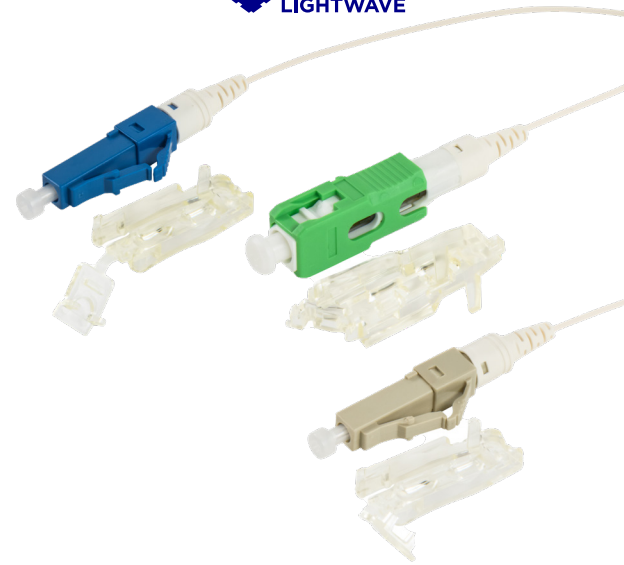

FEATURES

- Quick and Skill-free Installation, without Adhesives or Polishing
- 1-Minute or Less Low-loss Terminations
- Eliminates Bulky Mechanical Crimping Tools
- Improves Mechanical Splicing with Immediate Splice Verification
- Visible Inspection – Light Disappears when Installation is Successful
- Quick SC and LC Mechanical Connectors are Compatible with Standard SC (IEC 61754-4) and LC (IEC 61754-20) Connectors



QLC-PCMM5-250900

QLC-PCMM5OM3-250900

QLC-PCMM6-250900

QSC-APCSM-2.0

QSC-SPC-SM-250900

QLC-JIG-KIT

QSC-JIG-KIT

SPECIFICATIONS

PROPERTY	SPECIFICATION		
Connector Type	SC, LC		
Coating Diameter	250µm, 900µm		
Fiber Type	SM	MM(50), MM(62.5), MM50(OM3/4)	
Polishing	APC	UPC	PC
Insertion Loss	Typical 0.3dB Max. 0.6dB	Typical 0.2dB Max. 0.5dB	Typical 0.1dB Max. 0.3dB
Return Loss	Typical 55dB Min. 50dB	Typical 50dB Min. 45 dB	Typical 35dB Min. 22 dB

To learn more information visit www.SumitomoElectricLightwave.com

ORDERING INFORMATION

SUMITOMO ELECTRIC P/N	DESCRIPTION	UOM
QSC-APCSM-250900	QUICK-SC, APC, SM, 250/900µm	1 ea.
QSC-UPCSM-250900	QUICK-SC, UPC, SM, 250/900µm	1 ea.
QSC-PCMM5OM3-250900	QUICK-SC, PC, MM 50µm OM3/4, 250/900µm	1 ea.
QSC-PCMM5-250900	QUICK-SC, PC, MM 50µm, 250/900µm	1 ea.
QSC-PCMM6-250900	QUICK-SC, PC, MM 62.5µm, 250/900µm	1 ea.
QSC-APCSM-2.0	QUICK-SC, APC, SM, 2.0mm	1 ea.
QSC-UPCSM-2.0	QUICK-SC, UPC, SM, 2.0mm	1 ea.
QSC-PCMM5OM3-2.0	QUICK-SC, PC, MM50µm OM3, 2.0mm	1 ea.
QSC-APCSM-3.0	QUICK-SC, APC, SM, 3.0mm	1 ea.
QSC-UPCSM-3.0	QUICK-SC, UPC, SM, 3.0mm	1 ea.
QLC-APCSM-250900	QUICK-LC, APC, SM, 250/900µm	1 ea.
QLC-UPCSM-250900	QUICK-LC, UPC, SMF 250/900µm	1 ea.
QLC-PCMM5OM3-250900	QUICK-LC, PC, MM 50µm OM3/4, 250/900µm	1 ea.
QLC-PCMM5-250900	QUICK-LC, PC, MM 50µm, 250/900µm	1 ea.
QLC-PCMM6-250900	QUICK-LC, PC, MM 62.5µm, 250/900µm	1 ea.
QLC-APCSM-2.0	QUICK-LC, APC, SM, 2.0mm	1 ea.
QLC-UPCSM-2.0	QUICK-LC, UPC, SM, 2.0mm	1 ea.
QLC-APCSM-3.0	QUICK-LC, APC, SM, 3.0mm	1 ea.
QLC-UPCSM-3.0	QUICK-LC, UPC, SM, 3.0mm	1 ea.
QLC-PCMM5OM3-3.0	QUICK-LC, PC, MM 50µm OM3, 3.0mm	1 ea.
QSC-JIG-KIT	Quick SC, Assembly JIG Base w/ 900µm Fiber Holder	1 ea.
QLC-JIG-KIT	Quick LC, Assembly JIG Base w/ 900µm Fiber Holder	1 ea.
QMC-TK-FC6Sp	Basic tool kit for Quick Connectors. Includes tool bag, FC-6Sp cleaver, Fiber Optic Cleaning Solution, Cleaning Wipes, and Mechanical Fiber Strippers.	
QMC-TK-FC8R	Basic tool kit for Quick Connectors. Includes tool bag, FC-8RF cleaver, Fiber Optic Cleaning Solution, Cleaning Wipes, and Mechanical Fiber Strippers.	1 ea.
QSCLC-CORD TOOL	Prepares cordage for installation on cordage connectors without the need for measurements. For use with installation jig QSC-JIG-KIT or QLC-JIG-KIT. Not needed for "By Hand" installation.	1 ea.
QSC-CORD-FIX-JIG	Holds cordage and connector during installation of Q-SC cordage connectors. For use with installation jig QSC-JIG-KIT. Not needed for "By Hand" installation.	1 ea.
EFC-250-S	PureConnect™ Connector & Bulkhead Simplex Cleaner for 2.5mm Ferrule Connectors (such as SC, ST, and FC).	1 ea.
EFC-125-S	PureConnect™ Connector & Bulkhead Simplex Cleaner for 1.25mm Ferrule Connectors (such as LC).	1 ea.
FOS-01	Fiber Optic Shears	

To learn more information visit www.SumitomoElectricLightwave.com