

FTWM-08L Wall Mount Enclosure

Sumitomo Electric Lightwave's FTWM-08L Wall Mount Enclosure provides an indoor wall-mountable metal cabinet solution that is easy to install and route for a variety of cable constructions, including ribbon, loose-buffer, tight-buffer, and Air-Blown Fiber®. Having a fiber capacity of 192 or the ability to hold up to 8 FOX Splice Cassettes, LGX cassettes, or adapter modules, the Wall Mount Enclosure is a good solution to house the transition of outside plant cables and indoor distribution cables. In addition, its low profile allows for convenient placement in multiple locations.



FEATURES

- durable aluminum frame
- dual padlock eyelets
- removable dual-hinge doors
- 8 LGX panel spaces and 5-tray capacity
- pre-installed splice-tray mount, riser, & cable management rings
- nonabrasive round corners
- compatible tandem door & tube-distribution unit

BENEFITS

- allows for low profile
- space for cable slack
- ability to independently lock either side of demarcation for security
- riser allows clearance for fiber routing
- removal tray mount and management fins allows for cassettes to be used
- knock-out access point available for back entry

QUICK SPECS

192

Fiber Capacity

192

LC Capacity

8

Panel Capacity

Wall

Mount Type


To learn more information visit www.SumitomoElectricLightwave.com

APPLICATION & RECOMMENDED USE



Interconnect Panel Application

- Using Interconnect Panels, Fan-out Kit, & Splice Chip

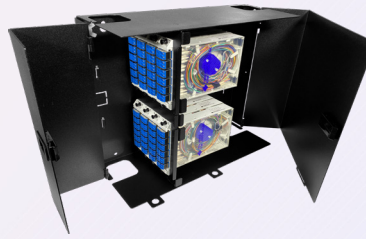

Cassette Application

- Using FOX Splice or LGX Cassettes



Tandem Tube Distribution Application

- Using FTWM-TANDEM-Door & DE06MDU
- Allows for direct transfer of fiber from tube distribution unit to termination unit

KITTING COMPONENTS

COMPONENT	QUANTITY
Caution Label	1
Small Tie Wraps	6
Medium Tie Wraps	2
Hook & Loop Tie Wrap	4
Long Screw	1
Wing Nut	1
Port Identification Label	1

ORDERING INFORMATION

PART NUMBER	HOLE TYPE	FIBER CAP.	PANEL CAP.	PORT CAP.	TRAY CAP.	DIMENSIONS
FTWM-08L	square/open	192f	8	192 LC	5	13 x 14.5 x 5.9 in (330 x 369 x 150 mm)

ACCESSORIES

PART NUMBER	DESCRIPTION	DIMENSIONS	COMPATIBLE ITEMS
FTWM-TANDEM-DOOR	replacement door for DE06MDU for tandem mounting of FTWM-08L	15.8 x 16 in (400 x 406 mm)	DE06MDU, FTWM-08L
DE06MDU	aluminum indoor tube distribution unit (406 mm) for Air-Blown Fiber®	6 x 16 x 4 in (406 x 406 x 102 mm)	FTWM-TANDEM-DOOR, FTWM-08L

To learn more information visit www.SumitomoElectricLightwave.com