

FTWM-04L Wall Mount Enclosure

Sumitomo Electric Lightwave's FTWM-04L Wall Mount Enclosure is an easy-to-install, indoor, wall-mountable metal cabinet solution capable of handling a wide range of cable constructions including ribbon, loose-buffer, tight-buffer, or FutureFlex® Air-Blown Fiber® bundles. Designed to hold up to 96 LC-Duplex adapters via 4 PrecisionFlex® FOX Splice Cassettes or LGX adapter panels along with ribbon or single-fiber splices, this enclosure is a good solution to house the transition of outside-plant cables to indoor-distribution cables. In addition, its low profile allows for convenient placement in a variety of locations.



FEATURES

- Durable Aluminum Housing
- Four LGX Cassette/Adapter Panel Slots
- Holds Up to 4 Splice Trays (12 X Single Fiber or 12 X Ribbon Splices Per Tray)
- Four Knockout Holes For Cable Entry (Grommets Included)
- Lockable Via Padlock (Not Supplied)

BENEFITS

- LGX Component Footprint
- Interior is Easily Accessible for Installation and Managing Fibers and Connections
- Compact and Efficient Size
- Lockable Housing for Security

QUICK SPECS

144

FIBER CAPACITY

96

LC CAPACITY

4


PANEL CAPACITY

Wall

MOUNTING TYPE


To learn more information visit www.SumitomoElectricLightwave.com

APPLICATION & RECOMMENDED USE

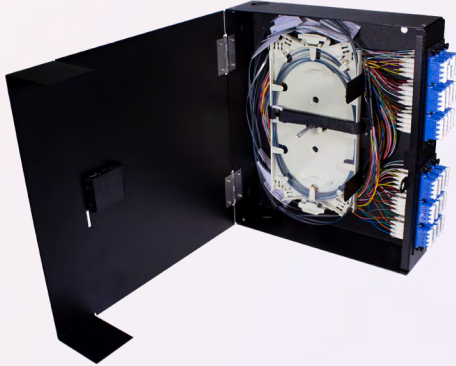

SPLICING APPLICATION

- FTWM-04L Splice Tray Holder
- Splice Tray & Splice Chip
- Adapter Panels, & Fan-out Kits

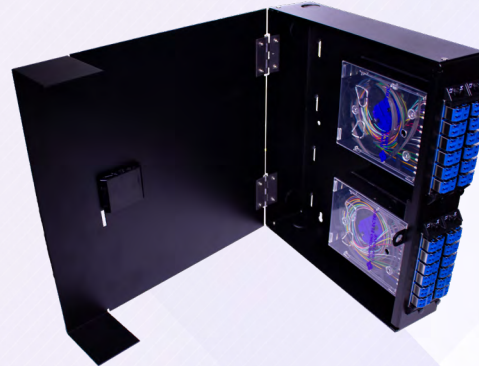

CASSETTE APPLICATION

- PrecisionFlex® FOX Splice or LGX Cassettes

KITTING COMPONENTS

COMPONENTS	QUANTITY
Cable Tie Mount	4
Tie Wraps	4
Hook & Loop Tie Wrap	1
Alcohol Pad	1
Grommet	4

ORDERING INFORMATION

PART NUMBER	CABLE ENTRY HOLE TYPE	FIBER CAP.	PANEL CAP.	PORT CAP	TRAY CAP.	DIMENSIONS
FTWM-04L	knockout	144f	4	96 LC	4	13.2 x 11.2 x 3.5 in (336 x 285 x 89 mm)

ACCESSORIES

PART NUMBER	DESCRIPTION
FTWM-04L-SPLICETRAY-BRACKET	FTWM-04L splice tray holder; compatible with FTWM-04L
FT-PFST-B-R	PrecisionFlex® splice tray with 144f (12 x 12ct) capacity
ST-01	splice tray with 144f (12 x 12ct) or 12f (12 x 1ct) capacity
FPS-40	single fiber protection sleeves, 1.57 in (40 mm). 10 per pack
FPS-1	single fiber protection sleeves, 2.36 in (60 mm). 50 per pack
FPS-61-2.6	pre-shrunk single fiber protection sleeves, 2.40 in (61 mm); 50 per pack
FPS-6	mass fiber protection sleeves, 1.57 in (40 mm); 20 per pack

To learn more information visit www.SumitomoElectricLightwave.com