


Freeform Ribbon® Interlocking Armored Outdoor/Indoor Low Smoke Halogen-Free Riser Central Tube Cables

Sumitomo Electric Lightwave's Freeform Ribbon® Interlocking Armored Outdoor/Indoor Low-Smoke Halogen-Free (LSHF) Riser Central Tube Cables feature a flame-retardant outer jacket, an interlocking armor, which adds protection against crushing forces, and the patented 12-fiber pliable Freeform Ribbon® constructed of 250 µm color-coded optical fibers. Freeform Ribbon® enables high-fiber density within a small cable diameter which in turn helps with limited duct space. The 12-fiber ribbons may be spliced to a conventional ribbon, pliable ribbon, or non-ribbonized (single) fibers, as well as connectorized with both MPO and all industry-standard connectors. The non-preferential bend axis allows for easy installation in space-constrained areas. In addition, this cable is designed for areas that require LSHF (e.g., subways systems and tunnels).

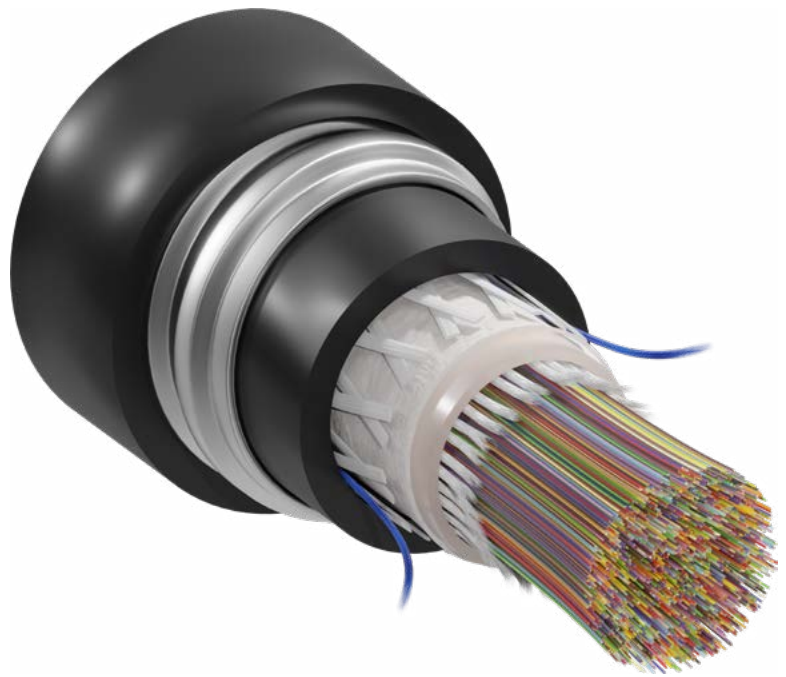

BENEFITS

- quick and easy fiber identification
- robust in indoor and outdoor environments
- high-fiber density maximizes duct space
- compatible with mass and single fiber fusion splicers, splice-on connectors, & hardware
- armor adds additional protection
- eliminates switching from OSP to ISP cables

FEATURES

- patented Pliable Freeform Ribbon® Color-Coded Optical Fibers
- SEL's PureAccess® Bend Insensitive Single-Mode Fiber G.657.A1
- gel-free, water-blocking tape & yarn
- dry central tube for easy installation
- flame-retardant, halogen-free, and UV-resistant outer jacket

QUICK SPECS

Central Tube
CABLE STRUCTURE

Freeform Ribbon®
RIBBON TYPE

12 - 1,728
FIBER COUNT

250µm
FIBER SIZE

GENERAL	
Application	outdoor/indoor
Jacket Color	black
Cable Structure	central tube
Ribbon Type	Freeform Ribbon®
Metallic Elements	bonding/grounding required

FIBER		
Fiber Type	PureAccess® G.657.A1 Bend Insensitive Single-Mode Fiber	
Fiber Attenuation Grades	standard single-mode	
Attenuation	1310 nm	0.40 dB/km
	1550 nm	0.25 dB/km

BEND RADIUS	
During Installation	20 x Cable OD
After Installation	10 x Cable OD


MECHANICAL CHARACTERISTICS	
Max. Tensile Load During Installation	600 lb (2,670 N)
Max. Recommended Service Load	180 lb (800 N)
Compression Resistance	125 lb/in (220 N/cm)

TEMPERATURE RANGE	
Operation	-40 to +70°C (-40 to +158°F)
Storage & Shipping	-40 to +158°F (-40 to +70°C)
Installation	+14 to +140°F (-10 to +60°C)

STANDARDS & COMPLIANCE	
Standards	NFPA 130, NFPA 502, OFCR, FT4, Low Smoke/ST-1
Regularity Compliance & Certifications	RoHS, REACH, Conflict Minerals, Proposition 65

ORDERING INFORMATION

PART NUMBER	FIBER COUNT	NOMINAL CENTRAL TUBE OD		NOMINAL CABLE OD		NOMINAL CABLE ARMOR OD		NOMINAL WEIGHT		FIBERS PER RIBBON	NO. OF BUNDLES
		IN	MM	IN	MM	IN	MM	LB/KFT	KG/KM		
250 μm											
SE-8RAP0012-B-12	12f	0.23	5.8	0.44	11.3	0.78	19.7	231.2	344.0	n/a	n/a
SE-8RAP0024-B-12	24f	0.23	5.8	0.44	11.3	0.78	19.7	231.2	344.0	n/a	n/a
SE-8RAP0036-B-12	36f	0.23	5.8	0.44	11.3	0.78	19.7	231.2	344.0	n/a	n/a
SE-8RAP0048-B-12	48f	0.23	5.8	0.44	11.3	0.78	19.7	231.2	344.0	n/a	n/a
SE-8RAP0072-B	72f	0.31	8.0	0.56	14.1	0.95	24.2	307.1	457.0	72f	1
SE-8RAP0096-B-12	96f	0.31	8.0	0.56	14.1	0.95	24.2	301.7	449.0	n/a	n/a
SE-8RAP0144-B	144f	0.31	8.0	0.56	14.1	0.95	24.2	307.1	457.0	72f	2
SE-8RAP0192-B-12	192f	0.44	11.3	0.67	17.0	1.01	25.6	340.6	507.0	n/a	n/a
SE-8RAP0216-B	216f	0.44	11.3	0.67	17.0	1.01	25.6	346.7	516.0	72f	3
SE-8RAP0288-B	288f	0.44	11.3	0.67	17.0	1.01	25.6	324.4	522.0	72f	4
SE-8RAP0432-B	432f	0.51	12.9	0.73	18.5	1.07	27.2	411.9	613.0	72f	6
SE-8RAP0864-B	864f	0.67	17.0	0.96	24.2	1.26	31.9	564.5	840.0	72f	12
SE-8RAP1152-B	1,152f	0.72	18.3	1.06	26.8	1.48	37.5	696.2	1,036.0	72f	16
SE-8RAP1728-B	1,728f	0.79	20.0	1.13	28.6	1.48	37.5	767.4	1,142.0	72f	24

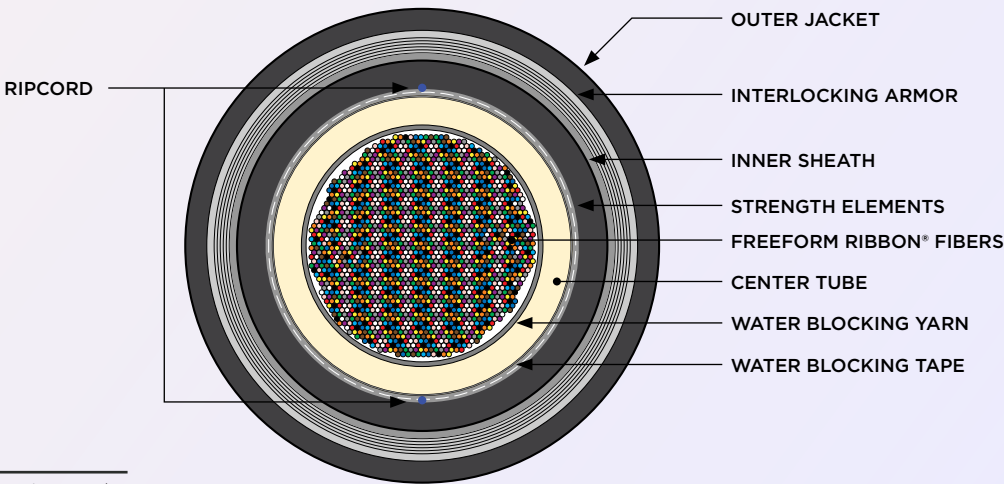

CROSS SECTION

Freeform Ribbon® Interlocking Armored
Outdoor/Indoor Low Smoke Halogen-
Free Riser Central Tube Cables